

"SUN-LINER MOTEL"


3433 CHINDEN BLVD

S-2

HYDRANT
34TH + BROWN
400'

HYDRANT
35TH + BROWN
350'

STOCKTON (ALLEY)

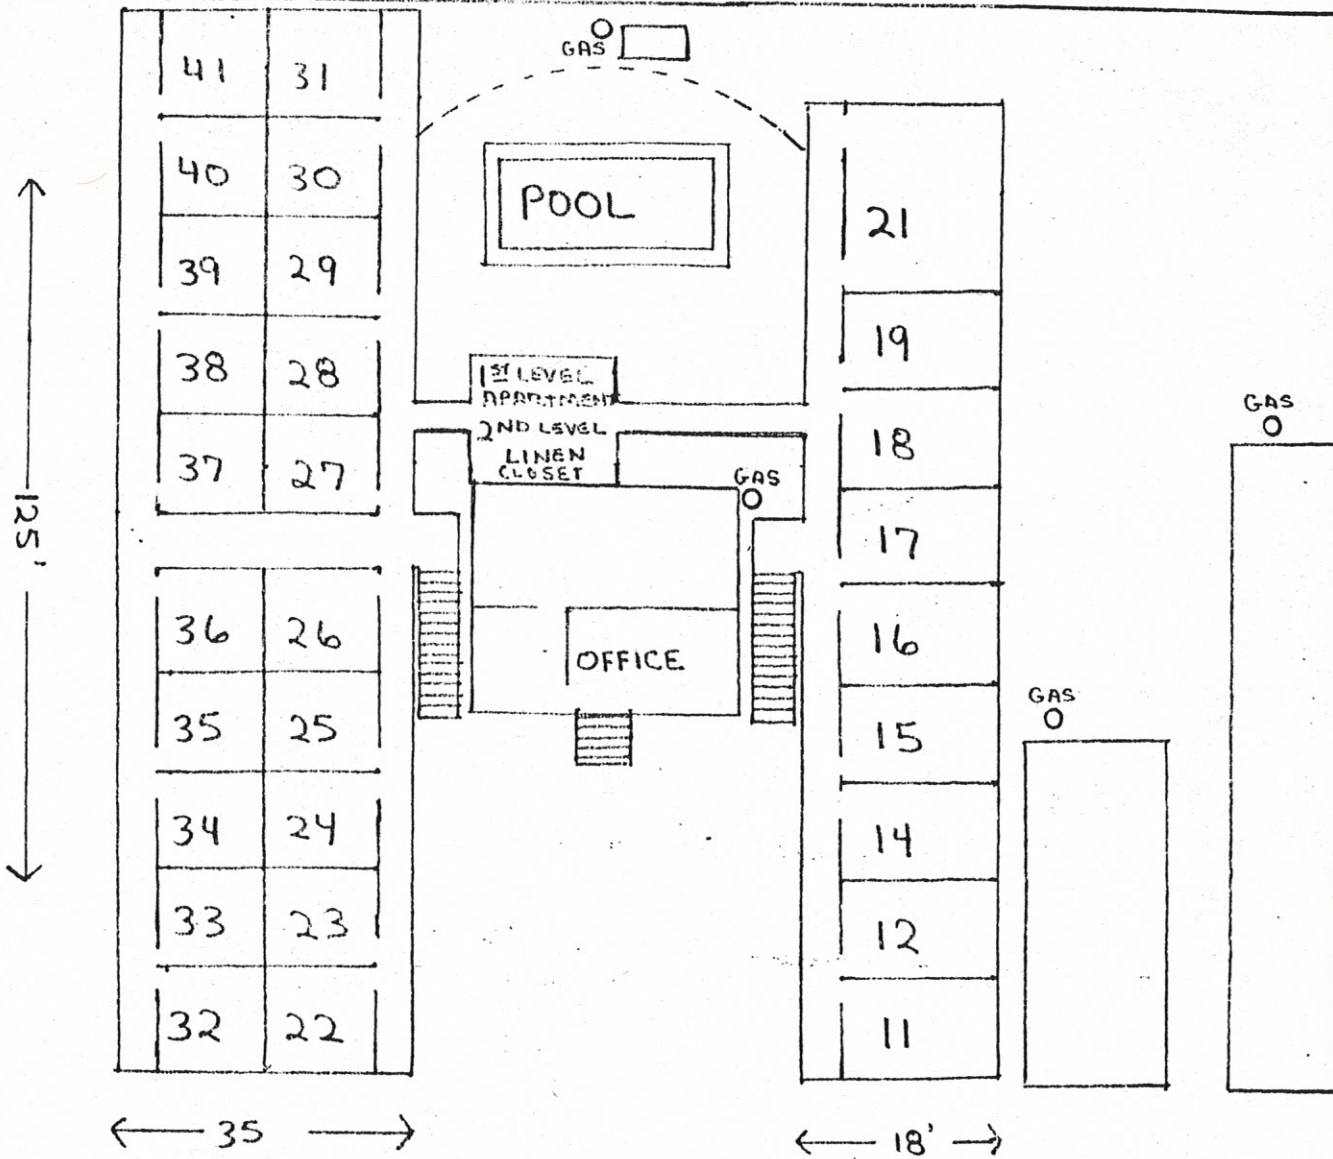

CHINDEN BLVD

HYDRANT
34TH + CHINDEN
250'

HYDRANT
35TH + CHINDEN
300'

QUICK ACCESS PREPLAN FORM

JAMES H. CR... ⁵⁻² ~~11~~

BUILDING ADDRESS 3433 Chinden Blvd.

BUILDING DESCRIPTION Metal sided wood Frame single
story Motel - elevated 8 feet with parking
underneath no attic space above rooms

GPM's

PER CENT OF INVOLVEMENT

	25%	50%	75%	100%
Needed Fire Flow -----	<u>225</u>	<u>450</u>	<u>675</u>	<u>900</u>
Personnel for GPM delivery including all exposures -----	<u>5</u>	<u>9</u>	<u>13</u>	<u>18</u>
Personnel for all types of support -----	<u>6</u>	<u>9</u>	<u>13</u>	<u>18</u>
Total personnel required -----	<u>11</u>	<u>18</u>	<u>26</u>	<u>36</u>
Personnel needed per company/unit for GPM delivery and all types of support				
Engine	<u>2</u>	<u>3</u>	<u>4</u>	<u>6</u>
Truck	<u>1</u>	<u>2</u>	<u>3</u>	<u>4</u>
Chief	<u>1</u>	<u>1</u>	<u>1</u>	<u>2</u>
Other	<u>1</u>	<u>1</u>	<u>1</u>	<u>2</u>

FIRE BEHAVIOR PREDICTION Rapid spread through floors
and ceiling space

STRATEGY Rescue with aggressive interior mobile
attack, open up floors and ceiling ahead of
fire

PROBLEMS ANTICIPATED elevated access

HAZARDS TO PERSONNEL early collapse due to open web
floor construction supported by glue laminated
beams with concrete pillars

STANDPIPES

☐

yes

☒

no

SPRINKLERS

☐

yes

☒

no